

FIG 1

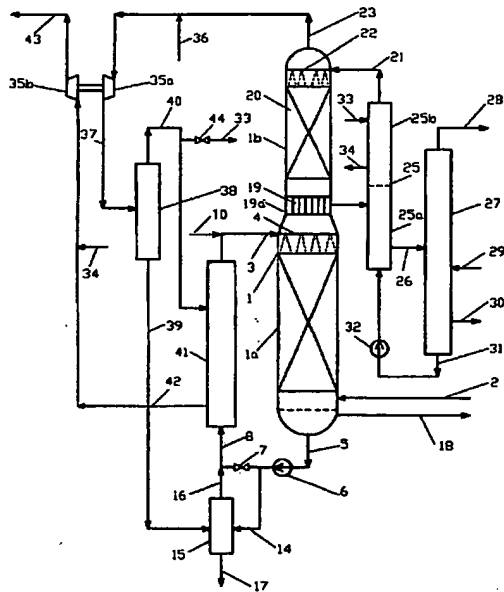


FIG 2

FIG. 3 is a cross-sectional view of the device 100 in a closed position. The device 100 includes a housing 102, a piston 104, a spring 106, and a valve 108. The piston 104 is positioned within the housing 102 and is biased by the spring 106. The valve 108 is positioned at the end of the housing 102 and is closed by the piston 104. The device 100 is configured to maintain a fluid within the housing 102 and prevent leakage through the valve 108.

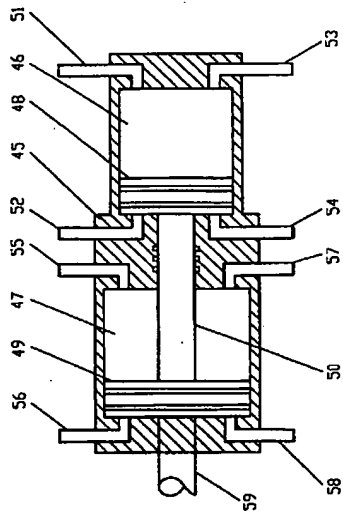


FIG 3